

WIDE VIEW MAST												
Mast model	Max. Lifting height	Load capacity(Load center 500mm)(kg)			Height mast retracted (C)(mm)	Tilting angles Forward /backward	Service Weight (kg)					
		CPC(D)40	CPC(D)45	CPC(D)50			CPCD40	CPCD45	CPCD50	CPC40	CPC45	CPC50
M260	2600	4000	4500	5000	2075	6° / 12°	6450	6750	7050	6150	6450	6750
M270	2700	4000	4500	5000	2125	6° / 12°	6475	6775	7075	6175	6475	6775
M300	3000	4000	4500	5000	2275	6° / 12°	6500	6800	7100	6200	6500	6800
M330	3300	4000	4500	5000	2425	6° / 12°	6515	6815	7115	6215	6515	6815
M350	3500	4000	4500	5000	2525	6° / 12°	6525	6825	7125	6225	6525	6825
M370	3700	4000	4500	5000	2625	6° / 12°	6535	6835	7135	6235	6535	6835
M375	3750	4000	4500	5000	2650	6° / 12°	6540	6840	7140	6240	6540	6840
M400	4000	4000	4500	5000	2825	6° / 6°	6550	6850	7150	6250	6550	6850
M425	4250	3800 *4000	4300 *4500	4700 *5000	2950	6° / 6°	6560	6860	7160	6260	6560	6860
M450	4500	3700 *4000	4200 *4500	4500 *5000	3075	6° / 6°	6575	6875	7175	6275	6575	6875
M475	4750	3500 *3700	4000 *4200	4250 *4600	3200	6° / 6°	6590	6890	7190	6290	6590	6890
M500	5000	3200 *3400	3600 *4000	4000 *4200	3325	6° / 6°	6600	6900	7200	6300	6600	6900
M550	5500	2900 *3100	3200 *3600	3600 *3800	3575	3° / 6°	6630	6930	7230	6330	6630	6930
M600	6000	2600 *2900	3000 *3200	3300 *3600	3825	3° / 6°	6650	6950	7250	6350	6650	6950

Note: * Refers to the rated capacity with front dual tyre.

WIDE VIEW FULL FREE 2-STAGE MAST														
Mast model	Max. Lifting height	Load capacity(Load center 500mm)(kg)			Height mast retracted (C)(mm)	Free lift (with backrest) (mm)	Full free lift (mm)	Tilting angles Forward /backward	Service Weight (kg)					
		CPC(D)40	CPC(D)45	CPC(D)50					CPCD40	CPCD45	CPCD50	CPC40	CPC45	CPC50
ZM261	2610	4000	4500	5000	2180	960	1380	6° / 12°	6475	6775	7075	6175	6475	6775
ZM271	2710	4000	4500	5000	2230	1010	1430	6° / 12°	6500	6800	7100	6200	6500	6800
ZM300	3000	4000	4500	5000	2375	1155	1575	6° / 12°	6550	6850	7150	6250	6550	6850
ZM330	3300	4000	4500	5000	2525	1305	1725	6° / 12°	6565	6865	7165	6265	6565	6865
ZM350	3500	4000	4500	5000	2625	1405	1825	6° / 12°	6575	6875	7175	6275	6575	6875
ZM375	3750	4000	4500	5000	2750	1530	1950	6° / 12°	6590	6890	7190	6290	6590	6890
ZM400	4000	4000	4500	5000	2875	1655	2075	6° / 6°	6605	6905	7205	6305	6605	6905
ZM450	4500	3700 *4000	4200 *4500	4500 *5000	3125	1905	2326	6° / 6°	6630	6930	7230	6330	6630	6930
ZM500	5000	3200 *3400	3600 *4000	4000 *4200	3375	2155	2576	6° / 6°	6665	6965	7265	6365	6665	6965
ZM550	5500	2900 *3100	3200 *3600	3600 *3800	3625	2405	2826	3° / 6°	6690	6990	7290	6390	6690	6990
ZM600	6000	2600 *2900	3000 *3200	3300 *3600	3875	2655	3076	3° / 6°	6715	7015	7315	6415	6715	7015

Note: (1)Free lift (without backrest) : +380mm;
(2)* Refers to the rated capacity with front dual tyre.

WIDE VIEW FULL FREE 3-STAGE MAST														
Mast model	Max. Lifting height	Load capacity(Load center 500mm)(kg)			Height mast retracted (C)(mm)	Free lift (with backrest) (mm)	Full free lift (mm)	Tilting angles Forward /backward	Service Weight (kg)					
		CPC(D)40	CPC(D)45	CPC(D)50					CPCD40	CPCD45	CPCD50	CPC40	CPC45	CPC50
ZSM392	3920	3840 *4000	4350 *4500	4800 *5000	2235	1012	1430	6° / 6°	6700	7000	7300	6400	6700	7000
ZSM435	4350	3500 *3800	4100 *4300	4400 *4800	2380	1157	1575	6° / 6°	6740	7040	7340	6440	6740	7040
ZSM450	4500	3350 *3500	4000 *4200	4200 *4700	2430	1208	1625	6° / 6°	6755	7055	7355	6455	6755	7055
ZSM470	4700	3250 *3400	3800 *4000	4050 *4200	2495	1274	1692	6° / 6°	6775	7075	7375	6475	6775	7075
ZSM480	4800	3150 *3300	3700 *3900	3950 *4100	2530	1307	1725	6° / 6°	6785	7085	7385	6485	6785	7085
ZSM500	5000	3050 *3200	3400 *3800	3800 *4000	2630	1407	1825	6° / 6°	6805	7105	7405	6505	6805	7105
ZSM540	5400	2750 *3000	3100 *3400	3400 *3600	2755	1532	1950	3° / 6°	6845	7145	7445	6545	6845	7145
ZSM600	6000	2400 *2500	2800 *3000	3100 *3400	2995	1772	2190	3° / 6°	6865	7165	7465	6565	6865	7165

Note: (1)Free lift (without backrest) : +365mm;
(2)* Refers to the rated capacity with front dual tyre.

HELI



H series / HIGH EFFICIENT ENERGY EFFICIENT

4-5 ton H series
INTERNAL COMBUSTION COUNTERBALANCED FORKLIFT TRUCK

Standard equipments	Optional equipments	Optional attachments
Standard fork	Cab	Side shifter
Standard carriage	Warning light	Fork positioner
M300 standard mast	Dual air cleaner	Double side shifter
Standard overhead guard	Heater	Single double pallet handler
Single air cleaner	Fan	Hinged forks
Standard muffler	Fire extinguisher	Rotator
Control valve (two throw)	Protecting net	Push/Pulls
Standard pneumatic tyre	Dual tyre	Carpet boom
Normal seat	Solid tyre	Load stabilizer
Driver's tool	Long fork	Turnaloards
	Suspension seat	Crane jib
	Windshield glass	Glass handler
	Rear working light	Fork extension
	Wide carriage	Paper roll clamp
	Control valve (multi throw)	Bale clamp
	High vertical exhaust	Drum clamp
	Spark arrested muffler	Fork clamp
	Catalyst muffler	Block clamp
	Tilting cylinder boot	Multi-purpose clamp
	Steering cylinder boot	
	Two stage free lift mast	
	Three stage free lift mast	



CENTRAL GROUP
FORKLIFTS & TRUCKS
Phone : 0800 538 735 Web : www.centralgroup.co.nz

4-5 ton H series
INTERNAL COMBUSTION COUNTERBALANCED FORKLIFT TRUCK



H series / HIGH EFFICIENT ENERGY EFFICIENT

HELI
LIFTING THE FUTURE



24 YEARS TOP1 FORKLIFT MANUFACTURER AND SELLER IN CHINA FOR CONSECUTIVE 24 YEARS

Date and design Characteristics

Character												
1.01	Manufacturer	HELI										
1.02	Model	CPCD40-M2	CPCD45-M2	CPCD50-M2	CPQYD40-TY5	CPQYD45-TY5	CPQYD50-TY5	CPC40-XC3	CPC45-XC3	CPC50-WX5		
1.03	Power type	Diesel			Gasoline/LPG			Diesel				
1.04	Rated capacity	kg	4000	4500	5000	4000	4500	5000	4000	4500	5000	
1.05	Load center	mm										
1.06	Driving mode	Seated										
Size												
2.01	Mast height, extended (with backrest, unloaded)	H2	mm									
2.02	max. Fork height	H	mm									
2.03	Mast height, lowered	H1	mm									
2.04	Free lift	H3	mm									
2.05	Backrest height (from the fork surface)	H13	mm									
2.06	distance from the seat surface to the overhead guard	H6	mm									
2.07	Overall height (overall height)	H4	mm									
2.08	Overall length (fork/without fork)	L/L'	mm	4145/3075	4165/3095	4209/3139	4145/3075	4165/3095	4209/3139	4145/3075	4165/3095	4209/3139
2.09	Front overhang	L2	mm									
2.10	Rear overhang	L3	mm	520	540	584	520	540	584	520	540	584
2.11	Wheel base	L1	mm									
2.12	Traction pin height	H9	mm									
2.13	Min. Under clearance (at mast)	H5	mm									
2.14	overall width	W1	mm									
2.15	Fork distance (external)(max./min.)	W5	mm									
2.16	Tread (front tread/rear tread)	W3/W2	mm									
2.17	Min. Turning radius (inside)	r'	mm									
2.18	min. Turning radius (outside)	r	mm									
2.19	min. Right angle aisle width	Ra	mm	2480	2500	2550	2480	2500	2550	2480	2500	2550
2.20	Mast tilting angle (front/rear)	α/β	6°/12°									
2.21	Fork size	L4xWxT	mm									
Performance												
3.01	Max. Travelling speed (loaded/unloaded)	Km/h	25/26			25/26			18/19		18/19	
3.02	lifting speed (loaded/unloaded)	mm/s	460/520			460/520			360/390		360/390	
3.03	Lowering speed (loaded/ unloaded)	mm/s	<600/>300									
3.04	Traction force (loaded/unloaded)	KN	22/16			25/16			21/14		31/14	
3.05	max. Gradeability(loaded/unloaded)	%	18/20	17/20	16/20	18/20	17/20	16/20	17/20	16/20	20/25	
Weight												
4.01	Service weight	Kg	6500	6800	7100	6500	6800	7100	6200	6500	6800	
4.02	Weight distribution loaded (front/rear)	Kg	8925/1575	9750/1550	10500/1600	8925/1575	9750/1550	10500/1600	8568/1632	9320/1680	10030/1770	
4.03	weight distribution unloaded (front/rear)	Kg	2700/3800	2710/4090	2680/4420	2700/3800	2710/4090	2680/4420	2635/3565	2730/3770	2890/3910	
Wheel and tyre												
5.01	Tyre number x=drive wheel (front/rear)	2X/2										
5.02	tyre type (front/rear)	Pneumatic tyre										
5.03	tyre model (front)	8.25-15-14PR		300-15-20PR		8.25-15-14PR		300-15-20PR		8.25-15-14PR		
5.04	Tyre model (rear)	7.00-12-12PR										
5.05	Service brake	powered brake-pedal tyre					vacuum assist –pedal type					
5.06	Parking brake	Mechanical-hand brake lever type										
Drive and control device												
6.01	Battery (voltage /capacity)	V/Ah	24/80			12/100			24/80			
6.02	Engine manufacturer /model	Mitsubishi S6S-230			GM 4.3L Gasoline/LPG			Xinchang 4D35G		Wuxi CA4110		
6.03	Engine rated power	KW/rpm	52/2300			Gasoline: 70/2300、LPG: 76.6/2300			48/2300		61/2200	
6.04	Engine rated torque	Nm/rpm	248/1700			Gasoline: 287/1700、LPG: 323.5/1700			230/1600~1800		305/1400~1600	
6.05	Engine cylinder (number-bore xstroke)	6-94x120			6-101.6x88.39			4-98x115		4-110x125		
6.06	engine displacement	L	4.966			4.29418			3.5		4.752	
6.07	Engine fuel tank capacity	L										
6.08	Gear number (front/rear)	2-1 powered shift					2-2 manual shift					

Engine Model and Main Specification for Option

Engine manufacturer /model	Engine rated power / rated speed KW/rpm	Max. torque/speed Nm/rpm	Engine displacement L	Engine cylinder (Number-borexstroke)	Applied model
Weifang 4RMG25-1	55/2200	270/1680	4.329	4-105x125	CPCD40-50-WF6
Wuxi CA4110	61/2200	305/1400~1600	4.75	4-110x125	CPCD40-50-Wx5
GM4.3L Tier IV Certified engine	Gasoline 70/2300	Gasoline 287/1700	4.29418	6-101.6x88.39	CPQD40-50-TY6
	LPG 76.6/2300	LPG 323.5/1700			
Quanchai 4C6-M	48/2300	230/1600~1800	3.47	4-98x115	CPC40-45-QC1

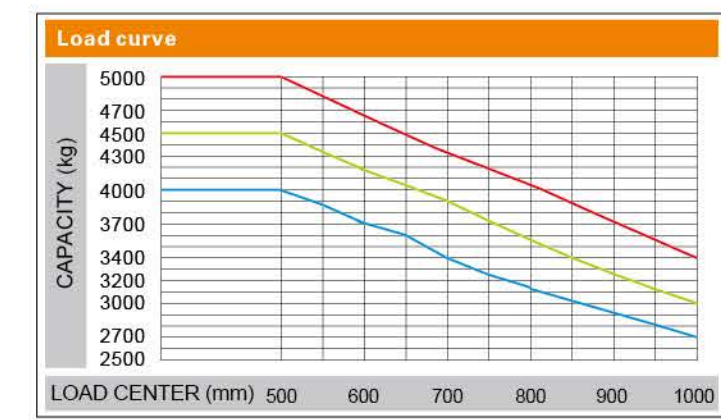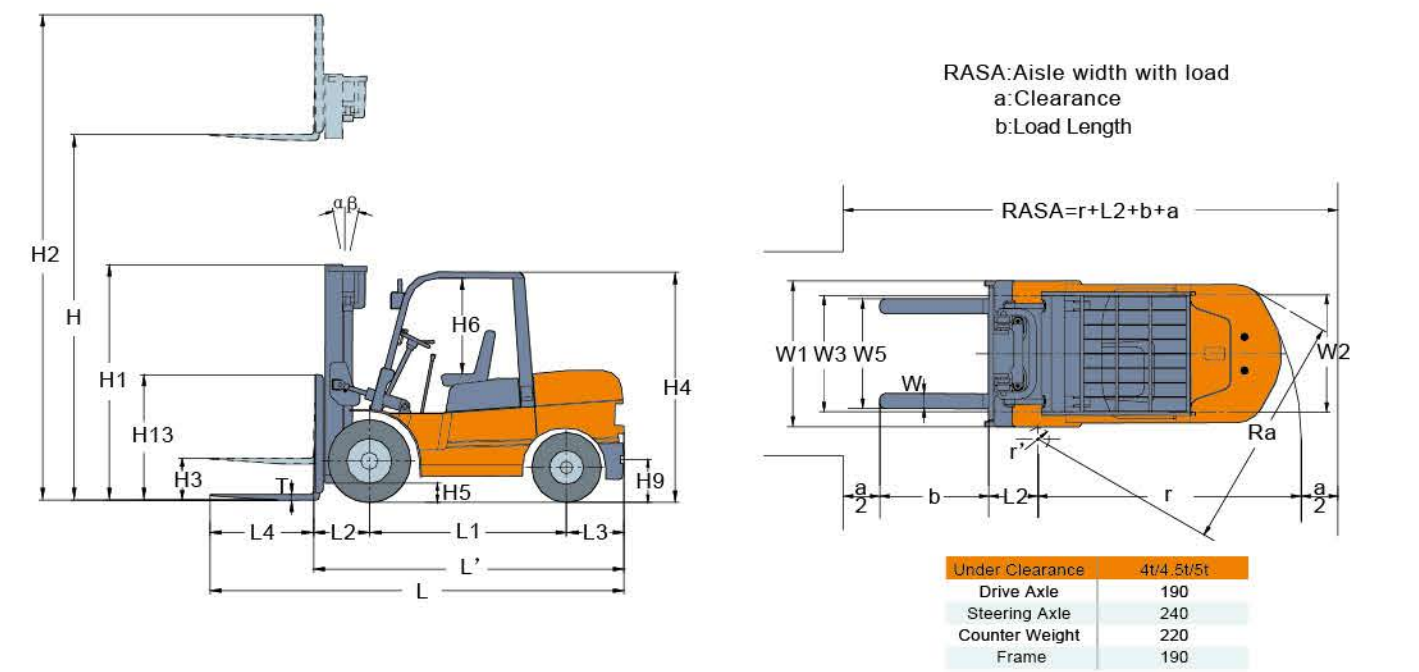

CPC(D)50 /CPQ(Y)D50 CPC(D)45 /CPQ(Y)D45 CPC(D)40 /CPQ(Y)D40

Note: The vertical axis stands for load capacity and the horizontal axis stands for load center which is calculated from the front surface of the forks to the gravity of the standard load. the standard load means a cubic with 1000mm edge length. When mast is tilted forward, using non-standard forks or loading large goods, the load capacity will be reduced. The load capacity of standard mast at different load center can be known from this load chart.

Mast lifting height and fork length table

	2600	2700	3000★	3300	3500	3700	3750	4000	4250	4500	4750	5000	5500	6000
Wide view normal mast lifting height (mm)	2600	2700	3000★	3300	3500	3700	3750	4000	4250	4500	4750	5000	5500	6000
two stage full free mast lifting height (mm)	2610	2710	3000	3300	3500	3750	4000	4500	5000	5500	6000			
three stage full free mast lifting height (mm)	3920	4350	4500	4700	4800	5000	5400	6000						
fork length (mm)	1070★	1220	1370	1520	1670	1820	1970	2120						

Note: Equipments with ★ is standard.