


CW SERIES EURO 5



MODEL: CW26-380L
6 x 4

GVW 26,000kg
GCW 50,000kg

ENGINE:	
Model	GH11
Type	Six cylinder in line, 24 valve, OHC, 4 stroke direct injection, turbo charged diesel with intercooler
Displacement	10837cc
Bore and stroke	123 x 152mm
Maximum output ECE	378 PS (278 kW) at 1800rpm (nett)
Maximum torque ECE	1790 Nm (1320lb/ft) at 950rpm (nett)
Maximum output JIS	393 PS (289 kW) at 1800rpm (gross)
Maximum torque JIS	1859 Nm (1375lb/ft) at 950rpm (gross)
On load max rpm	2300
Total Oil capacity	33 litres
Lubrication system	Gear pump, flat tube oil cooler, 2 x full flow and 1 x by-pass oil filters.
Air cleaner	Primary and secondary paper element air filters.
Standard air intake	High mounted left hand side
Emission standard	ADR80/03- Euro 5
Primary	Selective Catalytic Reduction (SCR)
AdBlue tank	60 litre polymer tank with lockable cap

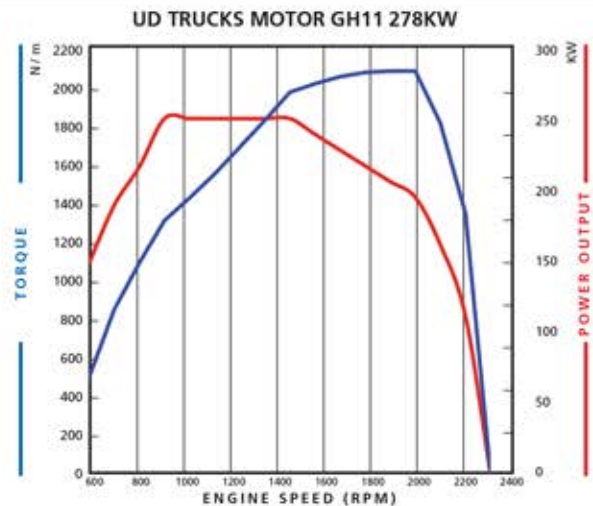

Engine Cooling System	
Radiator	Corrugated fin type
Water pump	Centrifugal
Header tank	Expansion type fitted
Temperature control	Wax pellet type thermostat
Fan	680mm mounted on viscous hub

DRIVELINE, ELECTRICAL & FUEL:	
Clutch	
Make	UD Trucks
Type	Dry single plate with push type diaphragm Hydraulically operated with air assist
Clutch diameter	430mm
Front Axle	
Model	UD Trucks Dropped Forged reverse Elliot "I" Beam Factory Rated at 8,200kg
Rear Axle	
Model	UD Trucks
Type	Fully floating pressed steel banjo housing
Factory rated at	10,000kg each
Differential	
Model	UD Trucks
Type	Single reduction hypoid
Standard Ratio	4.111:1

Gearbox																																	
Model	UD Trucks ATO2612D – 2 pedal operation																																
Gearshift	Fully automated manual (Escot 5) 12 forward and two reverse gears. Synchronised range and splitter gears.																																
Shift type	Electronic sequential shifter																																
Ratios	<table border="1"> <tbody> <tr><td>1st</td><td>11.73</td><td>7th</td><td>2.70</td></tr> <tr><td>2nd</td><td>9.21</td><td>8th</td><td>2.12</td></tr> <tr><td>3rd</td><td>7.09</td><td>9th</td><td>1.63</td></tr> <tr><td>4th</td><td>5.57</td><td>10th</td><td>1.28</td></tr> <tr><td>5th</td><td>4.35</td><td>11th</td><td>1.00</td></tr> <tr><td>6th</td><td>3.41</td><td>12th</td><td>0.79</td></tr> <tr><td>Reverse 1</td><td>13.73</td><td></td><td></td></tr> <tr><td>Reverse 2</td><td>10.78</td><td></td><td></td></tr> </tbody> </table>	1st	11.73	7th	2.70	2nd	9.21	8th	2.12	3rd	7.09	9th	1.63	4th	5.57	10th	1.28	5th	4.35	11th	1.00	6th	3.41	12th	0.79	Reverse 1	13.73			Reverse 2	10.78		
1st	11.73	7th	2.70																														
2nd	9.21	8th	2.12																														
3rd	7.09	9th	1.63																														
4th	5.57	10th	1.28																														
5th	4.35	11th	1.00																														
6th	3.41	12th	0.79																														
Reverse 1	13.73																																
Reverse 2	10.78																																
Electrical System																																	
System	24 volt negative earth																																
Batteries	2 x 12 volt 140 Ah.																																
Alternator	130 amp																																
Fuel system																																	
Tank Capacity	400 litre alloy tank mounted on RHS chassis																																
Fuel system	Ultra high pressure unit injectors																																
Fuel filter	Primary and secondary engine mounted filters																																

CHASSIS

Chassis	
Type	Ladder channel section side rails
Dimension	300 x 90 x 8mm
Material	Pressed carbon steel 55kg / mm ² tensile steel
Brakes	Brakes
Service	Dual line full air, wedge type, ABS, EBS with ASR. Oil mist separator and air dryer
Drum dimensions	
Front	410 x 180 mm
Rear	410 x 220 mm
Total lining	10,280 cm ²
Parking brakes	Spring brakes acting on rear wheels
Auxiliary brakes	Exhaust plus engine decompression brake


Suspension	
Front	Semi-elliptic 4 taper leaf springs. 90 x 1550mm
Spring constant	43.8 kg / mm per spring
Rear	Trunion mounted leaf springs with 6 torque rods
Spring constant	272 kg/mm
Steering & Wheels	
Type	Integral power assisted recirculating ball steering box
Reduction ratio	24.1-26.8
Steering wheel	460mm diameter moulded polyurethane grip
Steering column	Fore / aft tilt, telescopic and lockable
Road Wheels	Pressed steel disc 8.25 x 22.5, ISO 335mm PCD, 10 stud, 165mm offset
Tyres	Front: 275/70 22.5 tubeless radials Rear : 275/70 tubeless radials

CAB & INSTRUMENTS

Gauges	
Instrument gauges	Fuel, dual air pressure, tachometer, AdBlue gauge. Speedometer with odometer and trip meter.
Multi Display	Water temperature, Engine oil temperature, Engine oil pressure day, date and time, service intervals.
Warning Devices	
Warning lamps	Engine control warning, low air pressure, parking brake/spring brake, hazard, air filter element, low oil pressure, oil filter clog. battery charge, SCR trouble, AdBlue quality
Indicator lamps	Turn signal, EE/exhaust brake, air heater, high beam, cruise control, non ABS trailer
Audible warning	
Devices include	Low air pressure, Engine system, Engine oil low level, Engine oil pressure, Overheat, Coolant level, Engine oil temp, EBS, Large clutch load, Defective range shift warning, Reverse buzzer, N setting buzzer, AdBlue low level.
Exterior	
Type	Steel construction fully suspended forward control Meets ECE-R29 safety standard. FUPS bars standard
Cab suspension	Full air suspension with hydraulic shock absorbers
Tilting	Electric-Hydraulic tilt system to 65 deg
Windshield	Laminated tinted safety glass
Windshield wiper	Three arms, dual speed with intermittent operation
Side and rear windows	Tinted safety glass
Cab front lid	Hinged for easy checking of maintenance (clutch fluid, coolant, engine oil)
Mirrors	Heated and electrically operated main mirrors. Passenger side rear and downward spotter mirrors

Interior	
Drivers seat	Cloth trimmed high-back multi adjustable air suspended seat with automatic height control. 3 point ELR lap sash seatbelts
Passengers seat	Cloth trimmed reclining high-back type fixed seat with lift up base. 3 point ELR lap sash seatbelts
Sun visors	Driver and passenger side
Overhead tray	Document holders on drivers and passenger side
Cup holder	Hot/cold holder in centre consol
Floor covering	Vinyl
Bunk	Bed in rear of cab, cloth trimmed type
Standard equipment	
Control switches	Two stalk controls which incorporate Reversing lamp, roof marker lamps 1. Turn signal, lighting 2. Wiper/washer/engine/exhaust brake, hazard warning, cruise control
Features	<ul style="list-style-type: none"> • Door intrusion bars • Air conditioner/Heater demister • 4 mode operation with 4 speed fan • Engine idling control button • Electric windows • Central Locking • UD Trucks Multi Media double din audio system • Cigar lighter • Electric horn • Foot rest • Spare tyre • Equipped tyre carrier • Tool kit
Lamps	<ul style="list-style-type: none"> • Halogen head lamps • Hazard / Turn signal / Clearance lamps • Stop / Tail lamps • Reversing Lamp • Roof marker lamps • License plate lamp

Dimensions & Performance

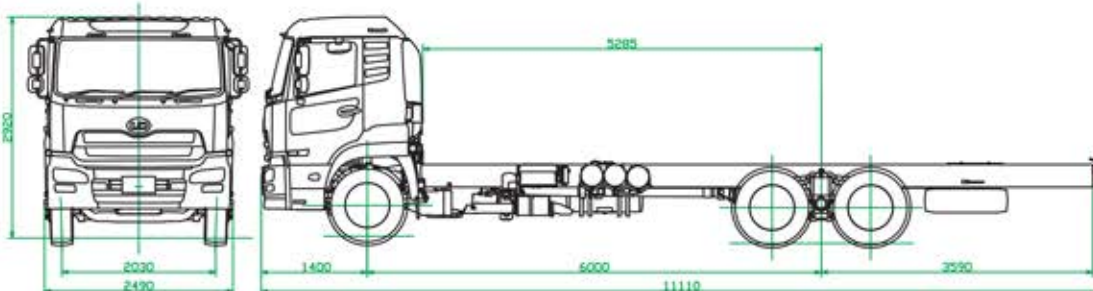

Cab & Chassis Weights Kg

Model CW26-380L	Front	Rear	Total
* With 20 litres of fuel, no spare wheel or tools	4390	3830	8220
* With 400 litres of fuel, spare wheel and tools	4510	4110	8620

IMPORTANT NOTICE: Weights obtained by weighing a vehicle on a NZ Govt. certified weighbridge. Please note that weights may vary from unit to unit.

Overall height 2920mm
Chassis width 840mm
Chassis height at R/A 1055mm



UD TRUCKS