

CW SERIES EURO 5

MODEL: CW26-380AS
6 x 4

GVW 26,000kg
GCW 50,000kg




ENGINE:

Engine

Model GH11
Type Six cylinder in line, 24 valve, OHC, 4 stroke direct injection, turbo charged diesel with intercooler

Displacement 10837cc
Bore and stroke 123 x 152mm
Maximum output ECE 378 PS (278 kW) at 1800rpm (nett)
Maximum torque ECE 1790 Nm (1320lb/ft) at 950rpm (nett)
Maximum output JIS 393 PS (289 kW) at 1800rpm (gross)
Maximum torque JIS 1859 Nm (1375lb/ft) at 950rpm (gross)
On load max rpm 2300
Total Oil capacity 33 litres
Lubrication system Gear pump, flat tube oil cooler, 2 x full flow and 1 x by-pass oil filters.

Air cleaner Primary and secondary paper element air filters.
Standard air intake High mounted left hand side
Emission standard ADR80/03- Euro 5
Primary Selective Catalytic Reduction (SCR)
AdBlue tank 60 litre polymer tank with lockable cap

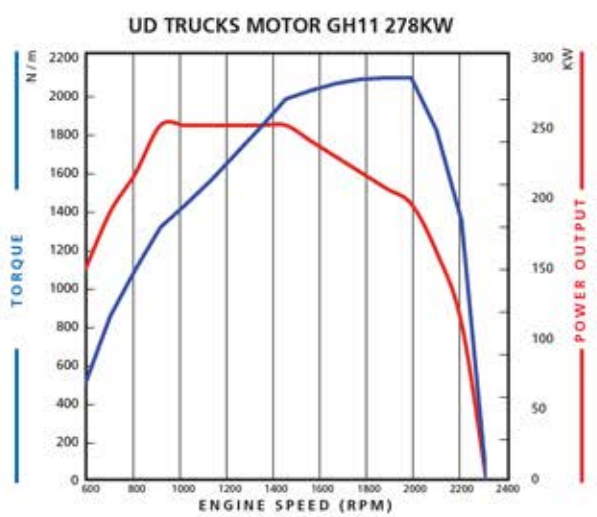

Engine Cooling System

Radiator Corrugated fin type
Water pump Centrifugal
Header tank Expansion type fitted
Temperature control Wax pellet type thermostat
Fan 680mm mounted on viscous hub

DRIVELINE, ELECTRICAL & FUEL:

Clutch

Make UD Trucks
Type Dry single plate with push type diaphragm Hydraulically operated with air assist
Clutch diameter 430mm

Front Axle

Model UD Trucks Dropped Forged reverse Elliot "I" Beam
Factory Rated at 8,200kg

Rear Axle

Model Nissan Diesel
Type Fully floating pressed steel banjo housing
Factory rated at 10,000kg each

Differential

Model UD Trucks
Type Single reduction hypoid
Standard Ratio 4.111:1

Gearbox

Model UD Trucks ATO2612D – 2 pedal operation
Gearshift Fully automated manual (Escot 5) 12 forward and two reverse gears. Synchronised range and splitter gears.
Shift type Electronic sequential shifter

Ratio	Value	Ratio	Value
1st	11.73	7th	2.70
2nd	9.21	8th	2.12
3rd	7.09	9th	1.63
4th	5.57	10th	1.28
5th	4.35	11th	1.00
6th	3.41	12th	0.79
Reverse 1	13.73		
Reverse 2	10.78		

Electrical System

System 24 volt negative earth
Batteries 2 x 12 volt 140 Ah.
Alternator 130 amp

Fuel system

Tank Capacity 400 litre alloy tank mounted on RHS chassis
Fuel system Ultra high pressure unit injectors
Fuel filter Primary and secondary engine mounted filters



CHASSIS

Chassis	
Type	Ladder channel section side rails
Dimension	300 x 90 x 8mm
Material	Pressed carbon steel 55kg / mm ² tensile steel
Brakes	Brakes
Service	Dual line full air, wedge type, ABS, EBS with ASR. Oil mist separator and air dryer
Drum dimensions	
Front	410 x 180 mm
Rear	410 x 220 mm
Total lining	10,280 cm ²
Parking brakes	Spring brakes acting on rear wheels
Auxiliary brakes	Exhaust plus engine decompression brake


Suspension	
Front	Semi-elliptic 4 taper leaf springs. 90 x 1550mm
Spring constant	43.8 kg / mm per spring
Rear	UD Trucks 8 Bag fully floating air suspension with V link controls
Spring constant	12.6 kg/mm
Steering & Wheels	
Type	Integral power assisted recirculating ball steering box
Reduction ratio	24.1-26.8
Steering wheel	460mm diameter moulded polyurethane grip
Steering column	Fore / aft tilt, telescopic and lockable
Road Wheels	Pressed steel disc 8.25 x 22.5, ISO 335mm PCD, 10 stud, 165mm offset
Tyres	Front: 275/70 22.5 tubeless radials Rear : 275/70 tubeless radials

CAB & INSTRUMENTS

Gauges	
Instrument gauges	Fuel, dual air pressure, tachometer, AdBlue gauge. Speedometer with odometer and trip meter.
Multi Display	Water temperature, Engine oil temperature, Engine oil pressure day, date and time, service intervals.
Warning Devices	
Warning lamps	Engine control warning, low air pressure, parking brake/ spring brake, hazard, air filter element, low oil pressure, oil filter clog, battery charge, SCR trouble, AdBlue quality
Indicator lamps	Turn signal, EE/exhaust brake, air heater, high beam, cruise control, non ABS trailer
Audible warning	
Devices include	Low air pressure, Engine system, Engine oil low level, Engine oil pressure, Overheat, Coolant level, Engine oil temp, EBS, Large clutch load, Defective range shift warning, Reverse buzzer, N setting buzzer, AdBlue low level.
Exterior	
Type	Steel construction fully suspended forward control Meets ECE-R29 safety standard. FUPS bars standard
Cab suspension	Full air suspension with hydraulic shock absorbers
Tilting	Electric-Hydraulic tilt system to 65 deg
Windshield	Laminated tinted safety glass
Windshield wiper	Three arms, dual speed with intermittent operation
Side and rear windows	Tinted safety glass
Cab front lid	Hinged for easy checking of maintenance (clutch fluid, coolant, engine oil)
Mirrors	Heated and electrically operated main mirrors. Passenger side rear and downward spotter mirrors

Interior	
Drivers seat	Cloth trimmed high-back multi adjustable air suspended seat with automatic height control. 3 point ELR lap sash seatbelts
Passengers seat	Cloth trimmed reclining high-back type fixed seat with lift up base. 3 point ELR lap sash seatbelts
Sun visors	Driver and passenger side
Overhead tray	Document holders on drivers and passenger side
Cup holder	Hot/cold holder in centre consol
Floor covering	Vinyl
Bunk	Bed in rear of cab, cloth trimmed type
Standard equipment	
Control switches	Two stalk controls which incorporate Reversing lamp, roof marker lamps 1. Turn signal, lighting 2. Wiper/washer/engine/exhaust brake, hazard warning, cruise control
Features	<ul style="list-style-type: none"> • Door intrusion bars • Air conditioner/Heater demister • 4 mode operation with 4 speed fan • Engine idling control button • Electric windows • Central Locking • UD Trucks Multi Media double din audio system
Lamps	<ul style="list-style-type: none"> • Cigar lighter • Electric horn • Foot rest • Spare tyre • Equipped tyre carrier • Tool kit <ul style="list-style-type: none"> • Halogen head lamps • Hazard / Turn signal / Clearance lamps • Stop / Tail lamps • Reversing Lamp • Roof marker lamps • License plate lamp

Dimensions & Performance

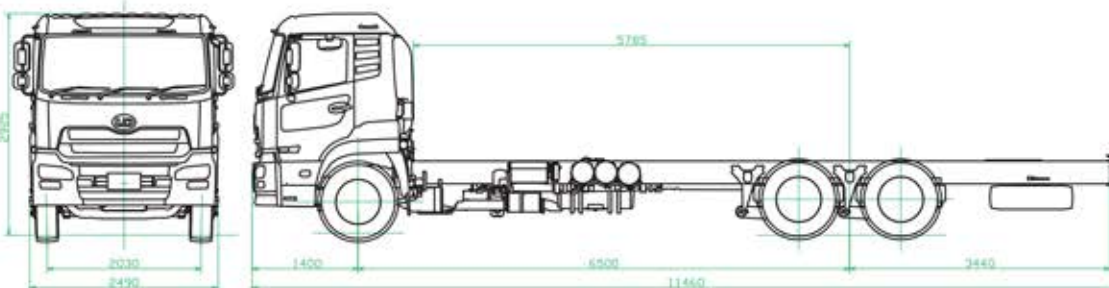

Cab & Chassis Weights Kg

Model CW26-380AS	Front	Rear	Total
* With 20 litres of fuel, no spare wheel or tools	4480	3720	8200
* With 400 litres of fuel, spare wheel and tools	4600	4020	8620

IMPORTANT NOTICE: Weights obtained by weighing a vehicle on a NZ Govt. certified weighbridge. Please note that weights may vary from unit to unit.

Overall height 2925mm
Chassis width 840mm
Chassis height at R/A 998mm



UD TRUCKS

This specification sheet applies to vehicles supplied by UD Truck Distributors (NZ) Ltd for the New Zealand market from August 2013. In accordance with UD Trucks Corporation policy of continuous improvement, the right is reserved to change specifications without notice.